


**Holes on  
blower  
bracket**



**Screen should  
show here.  
Probably  
sandwiched  
between the  
cardboard  
backing and  
bracket**



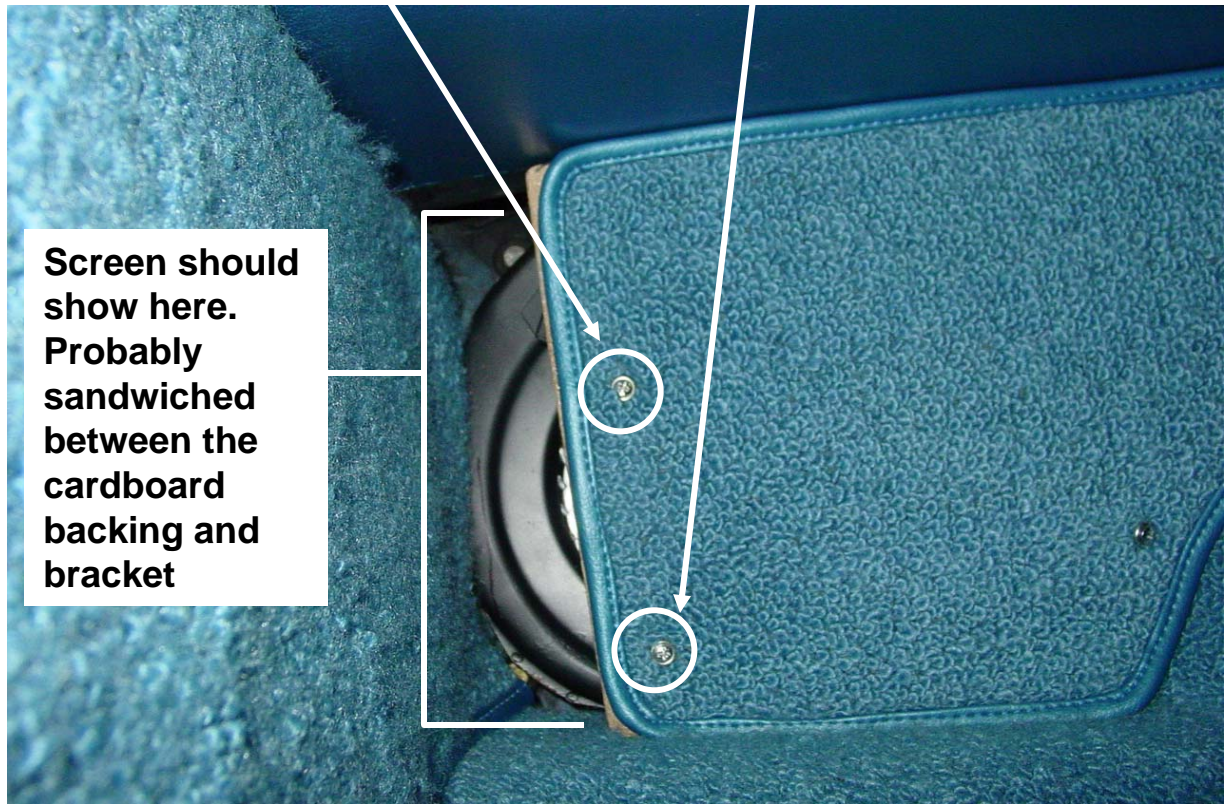

E 78

CHEVROLET

ASSEMBLY INSTRUCTIONS


3865300

CORVETTE 19000 SE

- 1 3862396 CARPET CHAIR
- 2 3862398 CARPET CHART
- ② 3 3872128 COVER CHART
- 4 3863093-4 COVER CHART L. & R.H.
- 5 3846395-6 CAP L. & R.H.
- ⚠ 6 4816192 SCREW
- ⚠ 7 9417987 SCREW
- 8 445347 "J" NUT
- 9 3850830 SCREEN
- 10 9420137 "J" NUT

⚠ 11 9420430 SCREW

⚠ 12 3846397 SPACER

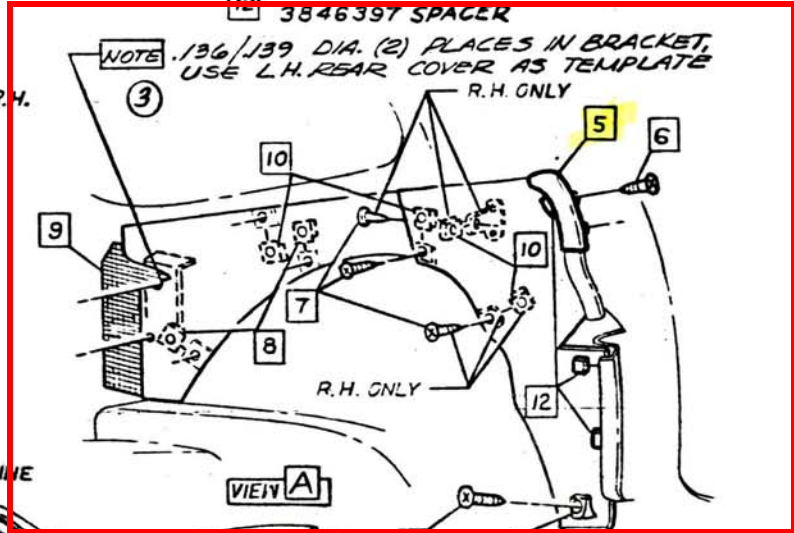

NOTE SLIT CARPETS AT ASM. TO CLEAR TRIM PANEL MTG. BRKTS. R.H. ONLY

2 CARPET TRIM LINE L.H. ONLY

NOTE .204/.207 DIA. THRU. SILL & REINF

NOTE SLIT CARPETS AT ASM. TO CLEAR TRIM PANEL MTG. BRKTS. L.H. ONLY

⚠ 15-20 LBS. IN.  
 ⚠ 35-50 LBS. IN.  
 ⚠

NOTE FOR CEMENT REQUIRED, SEE SHEET F11.

CHEVROLET MOTOR DIVISION, GMC		UPC	DATE	SYM	REVISION RECORD	AUTH	DR	CK
CARPETS & COVERS		1 ASM	7-24-64	A	1 REDRAWN & REVISED		JT	CI
			7-23-64		2 WAS 3850873 COVER	65162	DB	CI
			8-23-64		3 BRACKET NOTE REV.	69471	JM	CI
19437		F12.						
DWG PREL. 5-28	RAV	REF: Prot. F2 L-74704L						
DATE REL. 5-28		L- L- L-						
		☒ SHEET						

### **Rear Exhaust Ventilation Assembly (coupe only)**

All coupes, except those equipped with the optional 36 gallon fuel tank, have a rear exhaust system located in the left side of the rear storage compartment consisting of a blower, associated duct work, exterior grilles, control cable and a wire mesh safety screen all of which are concealed by a removable carpeted access panel. The access panel is covered with carpet and trimmed with a matching vinyl welting on the top, bottom and rear sides. The front side is placed under the rear quarter trim panel. A galvanized wire mesh (1/4" x 1/4" grid) safety screen is visible at the rear of the access panel that allows air to circulate to the exhaust fan.

*Note: Assign full credit for coupes equipped with 36-gallon fuel tank, option N03.*

### **Condition of Carpet Area**

Check carpeting for staining, fading and overall wear. Check quarter trim panels for bubbled or loose vinyl.

## **14. AREA UNDER DASH PANEL**

### **Pedals and Pads**

All brake and clutch pedal pads are black rubber with rounded corners and a pattern of horizontal bars on manual transmission cars versus vertical bars on Powerglide transmission cars. Power brake equipped cars state "POWER BRAKE" in raised block letters. The accelerator pedal uses a design of thin vertical grooves running lengthwise with all ends squared off. On reproduction pedals the top end of both outside grooves is often cut at a diagonal. The pedal is secured with two cadmium or zinc plated Phillips screws. The interior portion of the throttle linkage is plated black phosphate. The brake pedal light switch has a metal, not plastic body. Radio equipped cars have a capacitor connected to the switch's terminals.

### **Fuse Panel and Wiring**

A gloss black phenolic fuse panel is located on the fire wall just above the headlight beam switch. It has six fuses on the left side and terminals for accessories on the right side. All wiring is run neatly and is not visible from a seated position. This area should be free of any non-factory wires, splices or signs of repair. Any paint overspray is unacceptable.