


COOLANT FANS: V8 VIN 8 PRIMARY/SECONDARY

HOT AT ALL TIMES

HOT IN RUN, BULB TEST OR START

HOT AT ALL TIMES

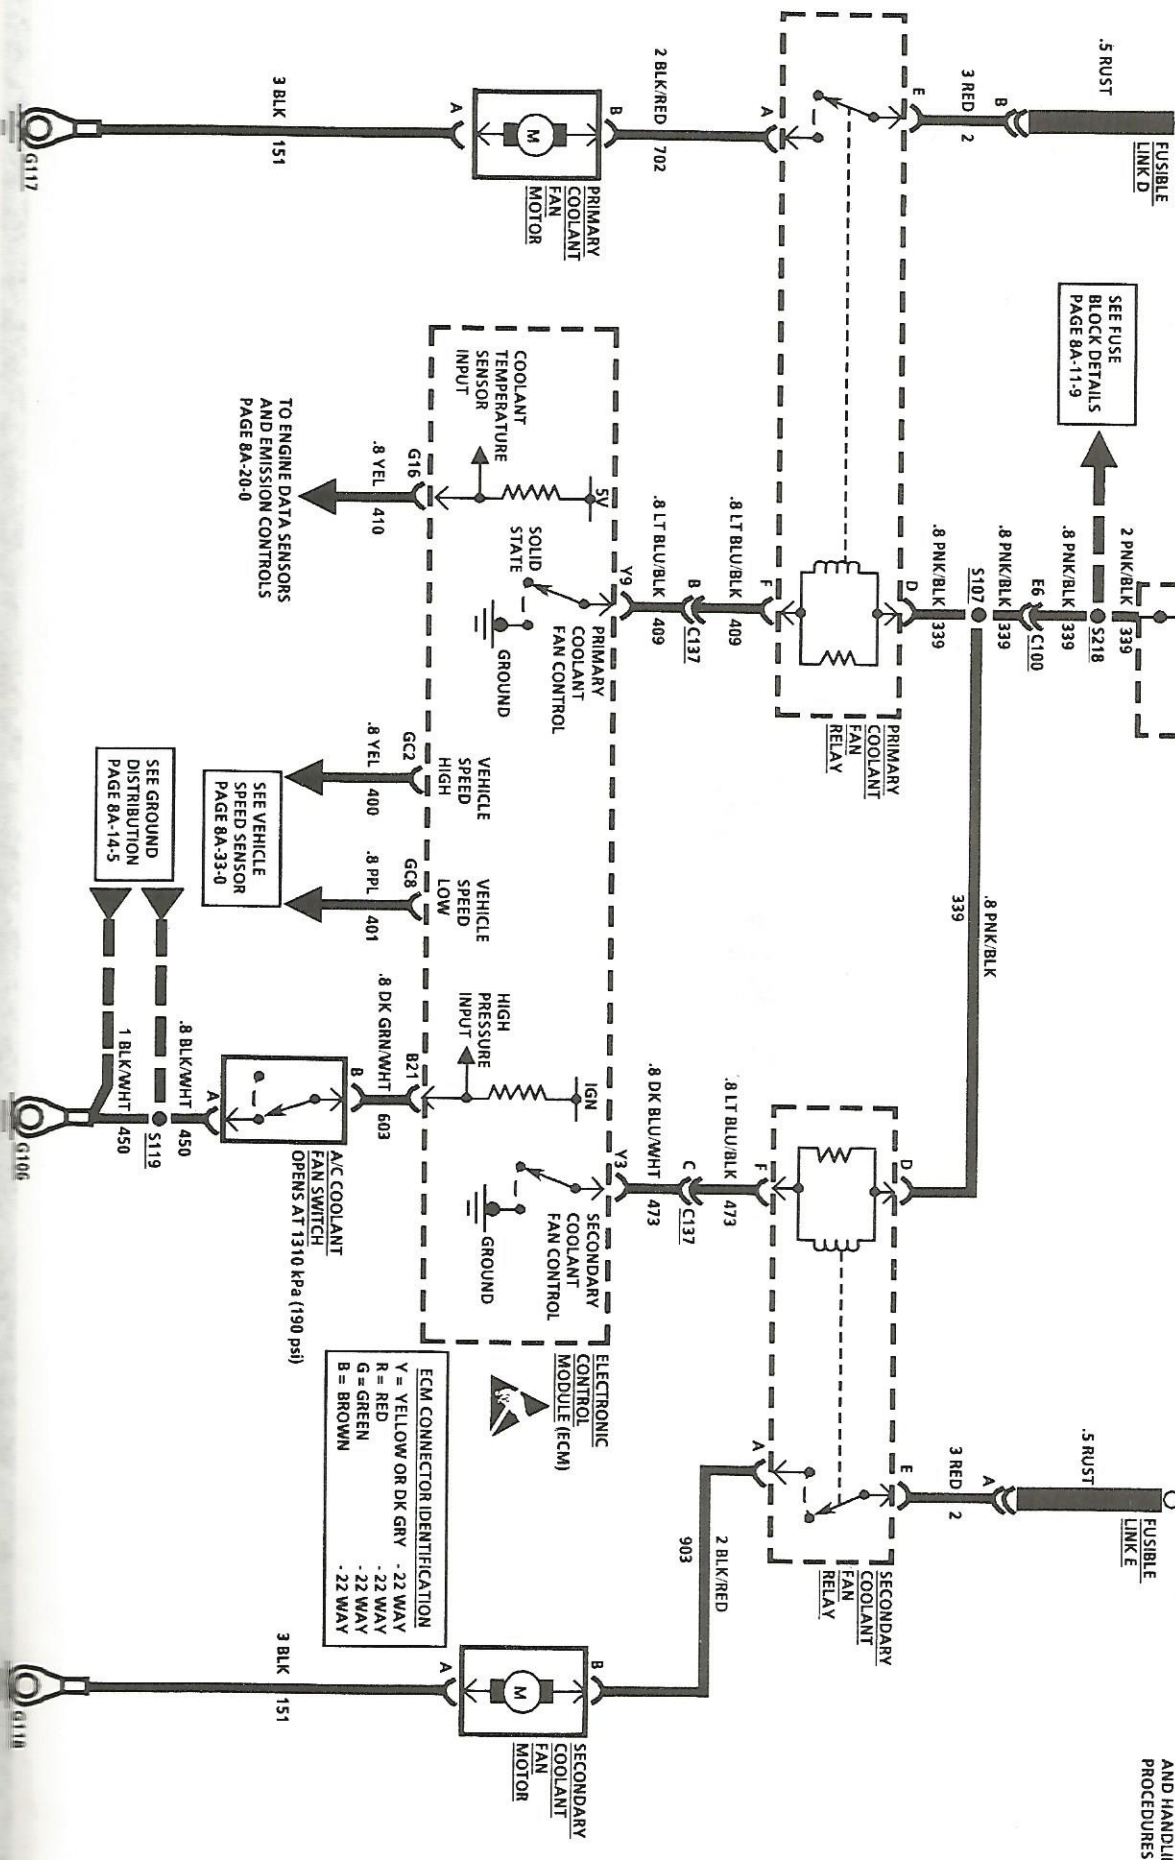

SEE FUSE BLOCK DETAILS PAGE 8A-11-9

TO ENGINE DATA SENSORS AND EMISSION CONTROLS PAGE 8A-20-0

SEE VEHICLE SPEED SENSOR PAGE 8A-33-0

SEE GROUND DISTRIBUTION PAGE 8A-14-5

ELECTRONIC CONTROL MODULE (ECM)

ECM CONNECTOR IDENTIFICATION

- Y = YELLOW OR DK GRN - 22 WAY
- R = RED - 22 WAY
- G = GREEN - 22 WAY
- B = BROWN - 22 WAY

A/C COOLANT FAN SWITCH OPENS AT 1310 kPa (190 psi)