2001 GENERAL MOTORS Corvette

### **2001 GENERAL MOTORS**

### Corvette

# **BUZZERS, RELAYS & TIMERS**

## **BUZZERS, RELAYS & TIMERS LOCATION**

DULLERS, RELATS & TIMERS LOCA	bullers, relats & Tiviers Location	
Component	Location	
A/C CLU Relay	In underhood fuse block. See <u>Fig. 5</u> .	
Air Pump Relay	In underhood fuse block. See <b>Fig. 5</b> .	
ALC HDLP Relay	In instrument panel fuse block. See <b>Fig. 5</b> .	
ALC PRK LP Relay	In instrument panel fuse block. See <b>Fig. 5</b> .	
Back-Up LP Relay	In underhood fuse block. See <b>Fig. 5</b> .	
Blower Motor Relay	On multi-use relay & fuse bracket, above BCM.	
Bose Relay	In instrument panel fuse block. See <b>Fig. 5</b> .	
Cooling Fan 1 Relay	In underhood fuse block. See <b>Fig. 5</b> .	
Cooling Fan 2 Relay	In underhood fuse block. See <b>Fig. 5</b> .	
Cooling Fan 3 Relay	In underhood fuse block. See <u>Fig. 5</u> .	
Courtesy Lamp Relay	In instrument panel fuse block. See <b>Fig. 5</b> .	
Daytime Running Lamp Relay (2)	In instrument panel fuse block. See <b>Fig. 5</b> .	
Defogger RR Relay	In instrument panel fuse block. See <b>Fig. 5</b> .	
Fog LP Relay	In underhood fuse block. See <u>Fig. 5</u> .	
Fuel Pump Relay	In underhood fuse block. See <b>Fig. 5</b> .	
Hatch/TRK Relay	In instrument panel fuse block. See <b>Fig. 5</b> .	
Horn Relay	In underhood fuse block. See <b>Fig. 5</b> .	
Ignition Relay	In underhood fuse block. See <b>Fig. 5</b> .	
Monitored Micro Relay	In instrument panel fuse block. See <b>Fig. 5</b> .	
RTD Relay	In underhood fuse block. See <b>Fig. 5</b> .	
Steering Column Lock Relay	In right footwell, mounted to toe board.	
Theft Deterrent Relay	In right footwell, above BCM.	
TONN REL Relay	In instrument panel fuse block. See <b>Fig. 5</b> .	

# **CIRCUIT PROTECTION DEVICES**

# CIRCUIT PROTECTION DEVICES LOCATION

2001 GENERAL MOTORS Corvette

Component	Location
Instrument Panel Fuse Block	In right front footwell, mounted to toe board.
	See <u>Fig. 5</u> .
LH Relay Center	Under center of left seat.
RH Relay Center	Under center of right seat. See <b>Fig. 5</b> .
Underhood Fuse Block	On right rear of engine compartment. See
	<u>Fig. 5</u> .

# **CONTROL UNITS**

# **CONTROL UNITS LOCATION**

Component	Location
Blower Motor Control Module	Behind right side of dash. See <b>Fig. 5</b> .
Body Control Module (BCM)	Mounted on toe board, in right footwell.
Bose Signal Processor	Under left side of dash, above accelerator
	pedal.
Door Control Module (2)	In lower center of respective door.
Driver Seat Control Module	On underside of driver's seat. See <b>Fig. 5</b> .
Electronic Brake Control Module (EBCM)	At left front side of engine compartment, on
	frame rail.
Electronic Suspension Control (ESC)	In rear compartment, inside rear tub. See Fig.
Module	<u>5</u> .
Headlamp Opening Door Actuator Control	In lower right front of engine compartment.
Module	See <u><b>Fig. 5</b></u> .
Ignition Control/Coil Module (8)	On valve covers, at top of respective
	cylinders. See <b>Fig. 3</b> .
Inflatable Restraint Sensing & Diagnostic Module	Below center of dash. See <u>Fig. 5</u> .
Powertrain Control Module (PCM)	On right side of engine compartment. See
	<u>Fig. 5</u> .
Radio Antenna Module	Behind lower "B" pillar trim panel.
Remote Control Door Lock Receiver	On left side of rear compartment.
Throttle Actuator Control (TAC) Module	On PCM, below battery.
Vacuum Control Assembly	On right side of HVAC unit, right of blower
	motor.

# **MOTORS**

2001 GENERAL MOTORS Corvette

# MOTORS LOCATION

Component	Location
Blower Motor	Under right side of dash.
Door Lock Actuator (2)	In respective door.
Electric Actuator (Left/Right)	On respective side of HVAC module.
Engine Cooling Fan Motor (Left)	Behind left side of radiator.
Engine Cooling Fan Motor (Right)	Behind right side of radiator.
Fuel Pump W/Left Fuel Level Sensor	In fuel tank.
Fuel Tank Filler Door Lock Actuator	On left side of cargo compartment, above fuel filler door.
Headlamp Opening Door Assembly (2)	Behind respective headlamp assembly.
Magnasteer Actuator	On left side of steering gear.
Power Seat Motor (3)	Under each seat.
Power Window Motor (2)	In lower section of each door.
Radio Power Antenna (Convertible)	Behind right rear inner quarter panel trim.
Rear Compartment Lid Latch Actuator (Convertible/Hardtop)	On center rear of rear compartment, on latch.
Rear Compartment Lid Latch Actuator (Coupe) (Left)	On left rear of rear compartment, on latch.
Rear Compartment Lid Latch Actuator (Coupe) (Right)	On right rear of rear compartment, on latch.
Secondary Air Injection (AIR) Pump Motor	On left front of engine compartment, on skid bar.
Telescoping Drive Motor	On lower right side of steering column.
Temperature Door Motor	On left side of HVAC module.
Throttle Actuator Control (TAC) Motor	On left side of throttle body. See <b>Fig. 3</b> .
Variable Effort Steering (VES) Actuator	On left side of steering rack assembly.
Windshield Washer Pump Motor	On left rear of engine compartment, in
	washer fluid reservoir.
Windshield Wiper Motor	On left side of firewall.

# **SENDING UNITS & SENSORS**

# SENDING UNITS & SENSORS LOCATION

Component	Location
A/C Refrigerant Pressure Sensor	On A/C high side line.

Accelerator Pedal Position (APP) Sensor	On top of accelerator pedal, part of mounting bracket.
Ambient Light Sensor	On top left side of dash.
Ambient Outside Air Temperature Sensor	On right front of engine compartment.
Automatic Transmission Fluid Temperature (TFT) Sensor	Inside transmission.
Brake Pressure Sensor	On brake combination valve, near master cylinder.
Camshaft Position (CMP) Sensor	On top center rear of engine. See <b>Fig. 2</b> .
Crankshaft Position (CKP) Sensor	On lower right side of engine.
Electronic Suspension Position Sensor (4)	On right side of respective shock absorber.
Engine Coolant Temperature (ECT) Sensor	On left side of engine below generator. See <b>Fig. 3</b> .
Engine Oil Level Sensor	On right side of oil pan.
Engine Oil Pressure (EOP) Sensor	On top center rear of engine. See <b>Fig. 2</b> .
Engine Oil Temperature (EOT) Gauge Sensor	On bottom left rear of engine. See <b>Fig. 1</b> .
Fuel Level Sensor (2)	Inside each respective fuel tank.
Fuel Tank Pressure Sensor	Near fuel filler neck.
Heated Oxygen Sensor (HO2S), Front (Left)	On exhaust system, forward of catalytic
	converter. See <u>Fig. 1</u> .
Heated Oxygen Sensor (HO2S), Front (Right)	On exhaust system, forward of catalytic converter.
Heated Oxygen Sensors (HO2S), Rear (2)	On exhaust system, rear of catalytic
	converters.
Inside Air Temperature Sensor	In air outlet, right of steering column.
Intake Air Temperature (IAT) Sensor	On front center of engine, in air duct. See
	<u>Fig. 4</u> .
Knock Sensor (Front/Rear)	On center of engine, below intake manifold.
Lateral Accelerometer	Under right seat.
Manifold Absolute Pressure (MAP) Sensor	On top rear of intake manifold. See <u>Fig. 2</u> .
Mass Air Flow (MAF) Sensor	On air intake assembly. See <u>Fig. 4</u> .
Starter Solenoid	On top of starter.
Steering Wheel Position Sensor	At base of steering column.
Sunload Temperature Sensor	On top of dash, right side of defroster grille.
Suspension Position Sensor (4)	In respective wheelwell, on suspension

2001 GENERAL MOTORS Corvette

	control arm.
Telescoping Sensor	On lower right side of steering column.
Throttle Position (TP) Sensor	On throttle body assembly. See <b>Fig. 3</b> .
Tire Pressure Monitor Sensor (4)	Inside each respective wheel, part of valve
	stem.
Vehicle Speed Sensor (VSS)	On right side of differential.
Wheel Speed Sensors (4)	Part of front wheel hub & rear wheel
	suspension knuckle.
Yaw Rate Sensor	Under HVAC control head.

# **SOLENOIDS & SOLENOID VALVES**

### SOLENOIDS & SOLENOID VALVES LOCATION

Component	Location
A/T Shift Lock Control Solenoid	Under center console, part of shifter.
Brake Pressure Modulator Valve (BPMV)	Left side of engine compartment, near power
	steering pump.
Evaporative Emission (EVAP) Canister	On top left side of engine, on intake
Purge Valve	manifold. See <u>Fig. 3</u> .
Evaporative Emission (EVAP) Vent Valve	Inside right rear wheelhouse panel.
Solenoid	
Fuel Door Lock Actuator	On left side of rear compartment, near fuel
	tank filler door.
Pressure Control Solenoid (PC SOL) Valve	Inside transmission.
Rear Compartment Lid Latch Actuator	On center rear of rear compartment, on latch.
(Convertible/Hardtop)	
Rear Compartment Lid Latch Actuator	On left rear of rear compartment, on latch.
(Coupe) (Left)	
Rear Compartment Lid Latch Actuator	On right rear of rear compartment, on latch.
(Coupe) (Right)	
Reverse Inhibit Solenoid	On left side of transmission.
Secondary Air Injection (AIR) Solenoid	Above PCM, between wheelhouse &
	firewall.
Shock Absorber Solenoid (4)	On bottom of respective shock absorber.
Skip Shift Solenoid (M/T)	Under vehicle, on left side of transmission.
Torque Converter Clutch Pulse Width	Inside transmission.
Modulation Valve Solenoid (TCC PWM	

2001 GENERAL MOTORS Corvette

SOL)	
Torque Converter Clutch Valve (TCC SOL)	Inside transmission.
Solenoid	
Valve 1-2 Shift Solenoid (1-2 SS)	Inside transmission.
Valve 2-3 Shift Solenoid (2-3 SS)	Inside transmission.
Valve 3-2 Shift Solenoid (3-2 SS)	Inside transmission.

## **SWITCHES**

# **SWITCHES LOCATION**

Component	Location
A/T Shift Lock Control Switch	Mounted on bracket, in front of brake pedal.
Automatic Transmission Fluid Pressure (TFP)	Inside transmission.
Manual Valve Position Switch	
Back-Up Lamp Switch (M/T)	On right side of transmission.
Brake Fluid Level Indicator Switch	In master cylinder reservoir.
Clutch Pedal Switch	On top of clutch pedal.
Park Brake Switch	On parking brake lever.
Park/Neutral Position Switch & Back-Up	On left side of transmission.
Lamp Switch	
Rear Compartment Lid Ajar Switch	On left rear compartment lid latch.
Seat Belt Switch	In driver's seat belt buckle assembly.
Stoplight Switch	On top of brake pedal support.
Windshield Washer Solvent Level Switch	Inside solvent container.

# **MISCELLANEOUS**

# MISCELLANEOUS LOCATION

Component	Location
A/C Diode	Taped in harness, near A/C compressor clutch
	connector.
Antenna Buffer	Bottom center of rear roof bow.
Compact Disc (CD) Player	In rear compartment, in center storage
	compartment.
Data Link Connector (DLC)	Under dash, below steering column.
Fuel Injector (8)	On top of intake manifold, at respective
	intake port.

2001 GENERAL MOTORS Corvette

Star Connector (2)	Instrument panel harness, near left side of
	BCM.

# **CONNECTORS**

# CONNECTORS LOCATION

Component	Location
C100 (Black, 8 Pin)	At right skid bar, in front of horns.
C101 (Black, 3 Pin)	On engine, above left lower control arm.
C102 (Black, 20 Pin)	At right rear of engine compartment.
C103 (Black, 2 Pin)	On engine, above left lower control arm.
C104 (Black, 3 Pin)	On engine, above right lower control arm.
C105 (Gray, 2 Pin) (W/ F45)	On left side of front suspension crossmember.
C105 (Gray, 2 Pin) (W/O F45)	On engine, above left lower control arm.
C106 (Black, 2 Pin)	On engine, above right lower control arm.
C107 (Black, 2 Pin)	On center of steering rack.
C108 (Gray, 2 Pin) (W/ F45)	At right side of front suspension
	crossmember.
C108 (Gray, 2 Pin) (W/O F45)	On engine, above right lower control arm.
C109 (Gray, 8 Pin)	At top center of left valve cover. See <u>Fig. 3</u> .
C110 (Gray, 8 Pin)	At top center of right valve cover. See $\underline{Fig}$ .
C112 (Black, 2 Pin)	At top rear of engine, mounted to vacuum
	hose. See <u>Fig. 2</u> .
C113 (Black, 2 Pin)	At right side of lower radiator support.
C140 (Black, 10 Pin)	At right side of engine compartment, below
	battery.
C142 (Gray, 20 Pin)	At right rear of engine compartment, below
	battery.
C144 (Gray, 20 Pin)	At right rear of engine compartment, below
	battery.
C146 (Black, 10 Pin)	At right rear of engine compartment, below
	battery.
C148 (Black, 10 Pin)	At right rear of engine compartment, below
	battery.
C150 (Gray, 20 Pin)	At right rear of engine compartment, below

	battery.
C200 (Black, 6 Pin)	In grommet, on right door.
C201 (Black, 6 Pin)	In grommet, on left door.
C202 (Blue, 10 Pin)	In grommet, on right door.
C203 (Blue, 10 Pin)	In grommet, on left door.
C204 (Black, 4 Pin)	At right rear of engine compartment, below
	battery.
C206 (Black, 3 Pin)	Under electronic traction/suspension control
	switch.
C207 (Black, 4 Pin)	On lower dash bar steering column lock.
C208 (Black, 3 Pin)	At left side of steering column, on dash lower beam.
C209 (Black, 23 Pin)	On lower dash bar headlight & turn signal switches.
C210 (Black, 2 Pin)	At left side of steering column, on dash lower beam.
C211 (2 Pin)	At left side of steering column, on lower dash bar.
C212 (Black, 3 Pin)	At left side of steering column, on dash lower beam.
C213 (Yellow, 2 Pin)	Taped to dash harness, near Bose signal
C217 (N. ( 1.10 P' )	processor.
C215 (Natural, 10 Pin)	Behind hazard warning switch.
C217 (Black, 4 Pin)	At left side of steering column, on lower dash bar.
C219 (Black, 6 Pin)	At left side of steering column, on dash lower beam.
C220 (Black, 8 Pin)	Between dash harness & vanity mirror jumper.
C301 (Black, 6 Pin)	Under left seat.
C302 (Black, 6 Pin)	Under right seat.
C303 (Blue, 8 Pin)	Under left seat.
C304 (4 Pin)	Between front body harness & keyless entry
	control module jumper harness.
C400 (Black, 8 Pin)	At rear of right rear control arm.
C401 (Black, 3 Pin)	On frame, below left rear shock absorber.

### 2001 GENERAL MOTORS Corvette

C402 (Black, 10 Pin)	Between transmission harness & fuel tank
	jumper harness.
C403 (Black, 2 Pin)	On frame, below left rear shock absorber.
C404 (Black, 3 Pin)	On frame, below right rear shock absorber.
C406 (Black, 2 Pin)	On frame, below left rear shock absorber.
C408 (Black, 4 Pin)	Fuel tank jumper harness to left fuel tank.
C409 (Black, 3 Pin)	Fuel tank jumper harness to fuel tank pressure
	sensor.

# **GROUNDS**

# **GROUNDS LOCATION**

Component	Location
G101	On left frame rail, near brake pressure
	modulator valve. See <b>Fig. 5</b> .
G102	On top of right frame rail, behind right
	headlight. See <b>Fig. 5</b> .
G103	On left frame rail, near brake pressure
	modulator valve.
G104	On right frame rail, below battery tray. See
	<u>Fig. 5</u> .
G105	On left bottom of engine. See <b>Fig. 1</b> .
G106	On right side of engine, above starter.
G107	At top left rear of engine. See <b>Fig. 2</b> .
G108	On right frame rail, below battery tray. See
	Fig. 5.
G201	At base of left "A" pillar. See <b>Fig. 5</b> .
G202	At base of right "A" pillar.
G205	Behind left seat, at antenna module. See <b>Fig.</b>
	<u>5</u> .
G301	Behind left seat, at antenna module.
G302	At right "B" pillar.
G401	At rear of vehicle, on inner side of left frame
	rail. See <b>Fig. 5</b> .
G402	At rear of vehicle, on inner side of right
	frame rail.

2001 GENERAL MOTORS Corvette

# **SPLICES**

# **SPLICES LOCATION**

from breakout to C110.  S101  In left ignition control module jumper, 6 cm from breakout to C109.  S102  In right ignition control module jumper, 5 cm from breakout to C110.  S103  In left ignition control module jumper, 5 cm from breakout to C109.  S104  In right ignition control module jumper, 4 cm from breakout to ignition coil/module No. 4.  S105  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  S106  In forward light harness, 12.5 cm from breakout to ECBM connector.  S107  In forward light harness, 20 cm from breakout to ECBM connector.	Component	Location
In left ignition control module jumper, 6 cm from breakout to C109.  In right ignition control module jumper, 5 cm from breakout to C110.  In left ignition control module jumper, 5 cm from breakout to C110.  In left ignition control module jumper, 5 cm from breakout to C109.  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 4.  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  In left ignition control module jumper, 4 cm from breakout to ECBM connector.  In forward light harness, 12.5 cm from breakout to ECBM connector.  In forward light harness, 20 cm from breakout to ECBM connector.  In forward light harness, 6 cm from breakout to ECBM connector.  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  In dash harness, 22.5 cm from inside rearview mirror breakout.  In dash harness, 35 cm from HVAC control head connector.  In dash harness, 35 cm from head connector.  In dash harness, 6 cm from breakout to ECBM in dash harness, 6 cm from breakout.  In dash harness, 6 cm from breakout to BCM.  In engine harness, 6.5 cm from breakout to C150.  In dash harness, 6.5 cm from breakout to data link connector.		In right ignition control module jumper, 6 cm
from breakout to C109.  S102  In right ignition control module jumper, 5 cm from breakout to C110.  S103  In left ignition control module jumper, 5 cm from breakout to C109.  S104  In right ignition control module jumper, 4 cm from breakout to ignition coil/module No. 4.  S105  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  S106  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  In forward light harness, 12.5 cm from breakout to ECBM connector.  S107  In forward light harness, 20 cm from breakout to ECBM connector.  S108  In forward light harness, 6 cm from breakout to ECBM connector.  S109  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  S200  In dash harness, 22.5 cm from inside rearview mirror breakout.  S201  In dash harness, 35 cm from HVAC control head connector.  S109  In dash harness, 6 cm from breakout to BCM.  S200  In dash harness, 6.5 cm from breakout to BCM.  S203  In dash harness, 6.5 cm from breakout to BCM.  S109  In dash harness, 6.5 cm from breakout to BCM.  S201  In dash harness, 6.5 cm from breakout to BCM.  S203  In dash harness, 6.5 cm from breakout to data link connector.		from breakout to C110.
In right ignition control module jumper, 5 cm from breakout to C110.  In left ignition control module jumper, 5 cm from breakout to C109.  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 4.  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  In forward light harness, 12.5 cm from breakout to ECBM connector.  In forward light harness, 20 cm from breakout to ECBM connector.  In forward light harness, 6 cm from breakout to ECBM connector.  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  In dash harness, 22.5 cm from inside rearview mirror breakout.  In dash harness, 35 cm from HVAC control head connector.  In dash harness, 39.5 cm from inside rearview mirror breakout.  In dash harness, 6 cm from breakout to BCM.  In dash harness, 6.5 cm from breakout to BCM.  In engine harness, 6.5 cm from breakout to C150.  In dash harness, 6.5 cm from breakout to data link connector.	S101	In left ignition control module jumper, 6 cm
from breakout to C110.  S103  In left ignition control module jumper, 5 cm from breakout to C109.  S104  In right ignition control module jumper, 4 cm from breakout to ignition coil/module No. 4.  S105  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  S106  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  In forward light harness, 12.5 cm from breakout to ECBM connector.  S107  In forward light harness, 20 cm from breakout to ECBM connector.  S108  In forward light harness, 6 cm from breakout to ECBM connector.  S120  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  S200  In dash harness, 22.5 cm from inside rearview mirror breakout.  S201  In dash harness, 35 cm from HVAC control head connector.  S202  In dash harness, 39.5 cm from inside rearview mirror breakout.  S203  In dash harness, 6 cm from breakout to BCM.  S204  In engine harness, 6.5 cm from breakout to C150.  S205  In dash harness, 6.5 cm from breakout to data link connector.		from breakout to C109.
In left ignition control module jumper, 5 cm from breakout to C109.  In right ignition control module jumper, 4 cm from breakout to ignition coil/module No. 4.  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  In forward light harness, 12.5 cm from breakout to ECBM connector.  In forward light harness, 20 cm from breakout to ECBM connector.  In forward light harness, 6 cm from breakout to ECBM connector.  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  In dash harness, 22.5 cm from inside rearview mirror breakout.  In dash harness, 35 cm from HVAC control head connector.  In dash harness, 39.5 cm from inside rearview mirror breakout.  In dash harness, 6.5 cm from breakout to BCM.  In engine harness, 6.5 cm from breakout to C150.  In dash harness, 6.5 cm from breakout to data link connector.	S102	In right ignition control module jumper, 5 cm
In right ignition control module jumper, 4 cm from breakout to ignition coil/module No. 4.		from breakout to C110.
In right ignition control module jumper, 4 cm from breakout to ignition coil/module No. 4.  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  In forward light harness, 12.5 cm from breakout to ECBM connector.  In forward light harness, 20 cm from breakout to ECBM connector.  In forward light harness, 6 cm from breakout to ECBM connector.  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  In dash harness, 22.5 cm from inside rearview mirror breakout.  In dash harness, 35 cm from HVAC control head connector.  In dash harness, 39.5 cm from inside rearview mirror breakout.  In dash harness, 6 cm from breakout to BCM.  In engine harness, 6.5 cm from breakout to C150.  In dash harness, 6.5 cm from breakout to data link connector.	S103	In left ignition control module jumper, 5 cm
from breakout to ignition coil/module No. 4.  S105  In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  S106  In forward light harness, 12.5 cm from breakout to ECBM connector.  S107  In forward light harness, 20 cm from breakout to ECBM connector.  S108  In forward light harness, 6 cm from breakout to ECBM connector.  S120  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  S200  In dash harness, 22.5 cm from inside rearview mirror breakout.  S201  In dash harness, 35 cm from HVAC control head connector.  S202  In dash harness, 39.5 cm from inside rearview mirror breakout.  S203  In dash harness, 6 cm from breakout to BCM.  S204  In engine harness, 6.5 cm from breakout to C150.  S205  In dash harness, 6.5 cm from breakout to data link connector.		from breakout to C109.
In left ignition control module jumper, 4 cm from breakout to ignition coil/module No. 5.  S106  In forward light harness, 12.5 cm from breakout to ECBM connector.  In forward light harness, 20 cm from breakout to ECBM connector.  In forward light harness, 6 cm from breakout to ECBM connector.  In forward light harness, 6 cm from breakout to ECBM connector.  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  In dash harness, 22.5 cm from inside rearview mirror breakout.  In dash harness, 35 cm from HVAC control head connector.  In dash harness, 39.5 cm from inside rearview mirror breakout.  In dash harness, 6 cm from breakout to BCM.  In dash harness, 6.5 cm from breakout to C150.  In dash harness, 6.5 cm from breakout to data link connector.	S104	In right ignition control module jumper, 4 cm
from breakout to ignition coil/module No. 5.  S106  In forward light harness, 12.5 cm from breakout to ECBM connector.  In forward light harness, 20 cm from breakout to ECBM connector.  In forward light harness, 6 cm from breakout to ECBM connector.  In forward light harness, 6 cm from breakout to ECBM connector.  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  S200  In dash harness, 22.5 cm from inside rearview mirror breakout.  In dash harness, 35 cm from HVAC control head connector.  S202  In dash harness, 39.5 cm from inside rearview mirror breakout.  S203  In dash harness, 6 cm from breakout to BCM.  S204  In engine harness, 6.5 cm from breakout to C150.  S205  In dash harness, 6.5 cm from breakout to data link connector.		
In forward light harness, 12.5 cm from breakout to ECBM connector.  In forward light harness, 20 cm from breakout to ECBM connector.  In forward light harness, 20 cm from breakout to ECBM connector.  In forward light harness, 6 cm from breakout to ECBM connector.  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  In dash harness, 22.5 cm from inside rearview mirror breakout.  In dash harness, 35 cm from HVAC control head connector.  In dash harness, 39.5 cm from inside rearview mirror breakout.  In dash harness, 6 cm from breakout to BCM.  In engine harness, 6.5 cm from breakout to BCM.  In engine harness, 6.5 cm from breakout to C150.  In dash harness, 6.5 cm from breakout to data link connector.	S105	
breakout to ECBM connector.  In forward light harness, 20 cm from breakout to ECBM connector.  In forward light harness, 6 cm from breakout to ECBM connector.  In forward light harness, 6 cm from breakout to ECBM connector.  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  In dash harness, 22.5 cm from inside rearview mirror breakout.  In dash harness, 35 cm from HVAC control head connector.  In dash harness, 39.5 cm from inside rearview mirror breakout.  In dash harness, 6 cm from breakout to BCM.  In dash harness, 6 cm from breakout to BCM.  In dash harness, 6.5 cm from breakout to C150.  In dash harness, 6.5 cm from breakout to data link connector.		from breakout to ignition coil/module No. 5.
S107  In forward light harness, 20 cm from breakout to ECBM connector.  In forward light harness, 6 cm from breakout to ECBM connector.  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  S200  In dash harness, 22.5 cm from inside rearview mirror breakout.  S201  In dash harness, 35 cm from HVAC control head connector.  S202  In dash harness, 39.5 cm from inside rearview mirror breakout.  S203  In dash harness, 6 cm from breakout to BCM.  S204  In engine harness, 6.5 cm from breakout to C150.  S205  In dash harness, 6.5 cm from breakout to data link connector.	S106	,
Breakout to ECBM connector.  S108  In forward light harness, 6 cm from breakout to ECBM connector.  S120  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  S200  In dash harness, 22.5 cm from inside rearview mirror breakout.  S201  In dash harness, 35 cm from HVAC control head connector.  S202  In dash harness, 39.5 cm from inside rearview mirror breakout.  S203  In dash harness, 6 cm from breakout to BCM.  S204  In engine harness, 6.5 cm from breakout to C150.  S205  In dash harness, 6.5 cm from breakout to data link connector.		breakout to ECBM connector.
In forward light harness, 6 cm from breakout to ECBM connector.  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  In dash harness, 22.5 cm from inside rearview mirror breakout.  In dash harness, 35 cm from HVAC control head connector.  In dash harness, 39.5 cm from inside rearview mirror breakout.  In dash harness, 39.5 cm from inside rearview mirror breakout.  In dash harness, 6 cm from breakout to BCM.  In engine harness, 6.5 cm from breakout to C150.  In dash harness, 6.5 cm from breakout to data link connector.	S107	In forward light harness, 20 cm from
to ECBM connector.  S120  In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  S200  In dash harness, 22.5 cm from inside rearview mirror breakout.  S201  In dash harness, 35 cm from HVAC control head connector.  S202  In dash harness, 39.5 cm from inside rearview mirror breakout.  S203  In dash harness, 6 cm from breakout to BCM.  S204  In engine harness, 6.5 cm from breakout to C150.  S205  In dash harness, 6.5 cm from breakout to data link connector.		breakout to ECBM connector.
In engine harness, 15 cm from main harness, in branch leading to powertrain control module.  S200 In dash harness, 22.5 cm from inside rearview mirror breakout.  S201 In dash harness, 35 cm from HVAC control head connector.  S202 In dash harness, 39.5 cm from inside rearview mirror breakout.  S203 In dash harness, 6 cm from breakout to BCM.  S204 In engine harness, 6.5 cm from breakout to C150.  S205 In dash harness, 6.5 cm from breakout to data link connector.	S108	In forward light harness, 6 cm from breakout
in branch leading to powertrain control module.  S200  In dash harness, 22.5 cm from inside rearview mirror breakout.  S201  In dash harness, 35 cm from HVAC control head connector.  S202  In dash harness, 39.5 cm from inside rearview mirror breakout.  S203  In dash harness, 6 cm from breakout to BCM.  S204  In engine harness, 6.5 cm from breakout to C150.  S205  In dash harness, 6.5 cm from breakout to data link connector.		
module.  S200  In dash harness, 22.5 cm from inside rearview mirror breakout.  S201  In dash harness, 35 cm from HVAC control head connector.  S202  In dash harness, 39.5 cm from inside rearview mirror breakout.  S203  In dash harness, 6 cm from breakout to BCM.  In engine harness, 6.5 cm from breakout to C150.  S205  In dash harness, 6.5 cm from breakout to data link connector.	S120	
S200 In dash harness, 22.5 cm from inside rearview mirror breakout.  S201 In dash harness, 35 cm from HVAC control head connector.  S202 In dash harness, 39.5 cm from inside rearview mirror breakout.  S203 In dash harness, 6 cm from breakout to BCM.  S204 In engine harness, 6.5 cm from breakout to C150.  S205 In dash harness, 6.5 cm from breakout to data link connector.		
S201 In dash harness, 35 cm from HVAC control head connector.  S202 In dash harness, 39.5 cm from inside rearview mirror breakout.  S203 In dash harness, 6 cm from breakout to BCM.  S204 In engine harness, 6.5 cm from breakout to C150.  S205 In dash harness, 6.5 cm from breakout to data link connector.		
S201 In dash harness, 35 cm from HVAC control head connector.  S202 In dash harness, 39.5 cm from inside rearview mirror breakout.  S203 In dash harness, 6 cm from breakout to BCM.  S204 In engine harness, 6.5 cm from breakout to C150.  S205 In dash harness, 6.5 cm from breakout to data link connector.	S200	
head connector.  S202 In dash harness, 39.5 cm from inside rearview mirror breakout.  S203 In dash harness, 6 cm from breakout to BCM.  S204 In engine harness, 6.5 cm from breakout to C150.  S205 In dash harness, 6.5 cm from breakout to data link connector.		
In dash harness, 39.5 cm from inside rearview mirror breakout.  S203 In dash harness, 6 cm from breakout to BCM.  In engine harness, 6.5 cm from breakout to C150.  S205 In dash harness, 6.5 cm from breakout to data link connector.	S201	
S203 In dash harness, 6 cm from breakout to BCM. S204 In engine harness, 6.5 cm from breakout to C150. S205 In dash harness, 6.5 cm from breakout to data link connector.		
S203 In dash harness, 6 cm from breakout to BCM. S204 In engine harness, 6.5 cm from breakout to C150. S205 In dash harness, 6.5 cm from breakout to data link connector.	S202	· · · · · · · · · · · · · · · · · · ·
S204 In engine harness, 6.5 cm from breakout to C150. S205 In dash harness, 6.5 cm from breakout to data link connector.		
S205 In dash harness, 6.5 cm from breakout to data link connector.		
S205 In dash harness, 6.5 cm from breakout to data link connector.	S204	
link connector.		
S206 In dash harness, 5 cm from breakout to		
	S206	In dash harness, 5 cm from breakout to

	blower motor control module connector.
S208	In dash harness, 32.5 cm from radio
	connectors.
S210	In dash harness, 10 cm from breakout to
	blower motor control module.
S212	In dash harness, 22.5 cm from electronic
	accessory plug connector.
S213	In dash harness, 7.5 cm right of brake switch
	connector breakout.
S215	In dash harness, 6.5 cm left of inflatable
	restraint dash breakout.
S300-IDC	In left power seat harness, 4 cm from
	breakout to right seat relay center connection.
S301-IDC	In left power seat harness, 2.5 cm from
	breakout for C301.
S302	In front body harness, 12 cm from right
	speaker breakout.
S303	In front body harness, 15 cm from right
	speaker breakout.
S304	In front body harness, 22.5 cm from right rear
	speaker breakout.
S308	In dash harness, 19 cm from yaw rate sensor
	connector.
S310	In dash harness, 11 cm from yaw rate sensor
	connector.
S312	In front body harness, 20 cm from SP302
	breakout.
S314	In front body harness, 20 cm from SP302
	breakout.
S391	In left power seat harness, under seat base.
S392	In left power seat harness, under seat base.
S400	In transmission harness, 6.5 cm from C402
	breakout.
S402	In transmission harness, 55 cm from right rear
	shock absorber breakout.
S408	In fuel tank jumper harness, 6.5 cm from
	C402 breakout.

### 2001 GENERAL MOTORS Corvette

S410	In fuel tank jumper harness, 81.5 cm from C408 breakout.
S481	In rear body harness, 6.5 cm from breakout to left back-up light.
S482	In rear body harness, 21.5 cm from SP400 breakout.
S484	In rear body harness, 8 cm from SP400 breakout.
S501-IDC	In left door harness, 6 cm from outside rearview mirror connector breakout.
S600-IDC	In right door harness, 6 cm from outside rearview mirror breakout.
SP100	In forward light harness, at breakout to right headlight opening door connector.
SP101	In forward light harness, near brake pressure modulator valve.
SP102	Taped to forward light jumper, 10 cm left of C100.
SP122	In engine harness, 30 cm from breakout to starter solenoid.
SP201	In dash harness.
SP202	In dash harness.
SP203	In dash harness.
SP208	In dash harness, on right side of dash.
SP302	In front body harness, 83.5 cm from right power seat breakout.
SP400	In rear body harness, taped to harness, between back-up light & tail/stoplight breakout.
SP402	In rear body harness, taped to harness, between auto fuse & right license light breakout.

# **COMPONENT LOCATION GRAPHICS**

NOTE: Figures may show multiple component locations. Refer to appropriate table for proper figure references.

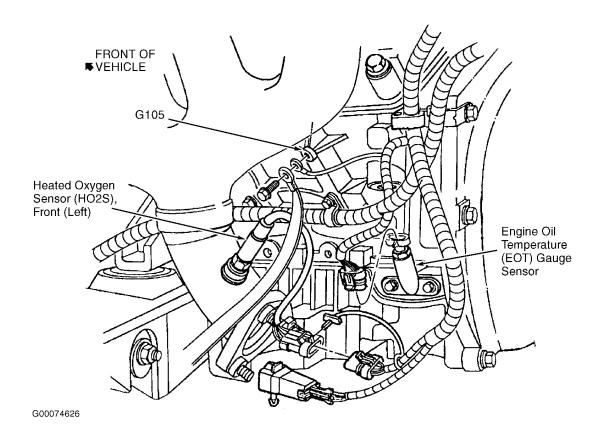


Fig. 1: Left Rear Of Engine Courtesy of GENERAL MOTORS CORP.

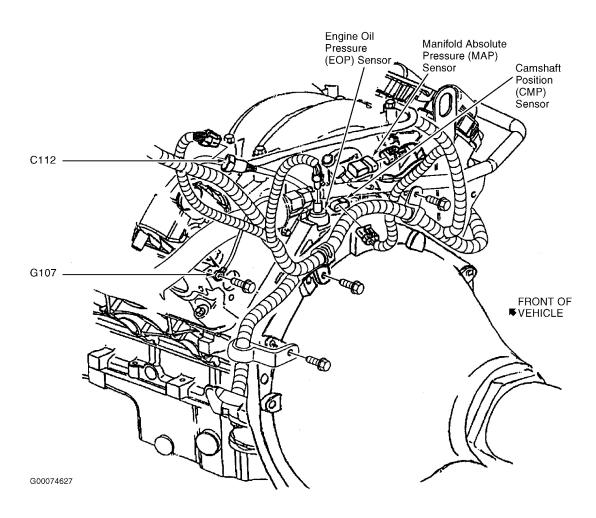


Fig. 2: Left Rear Of Engine
Courtesy of GENERAL MOTORS CORP.

### 2001 GENERAL MOTORS Corvette

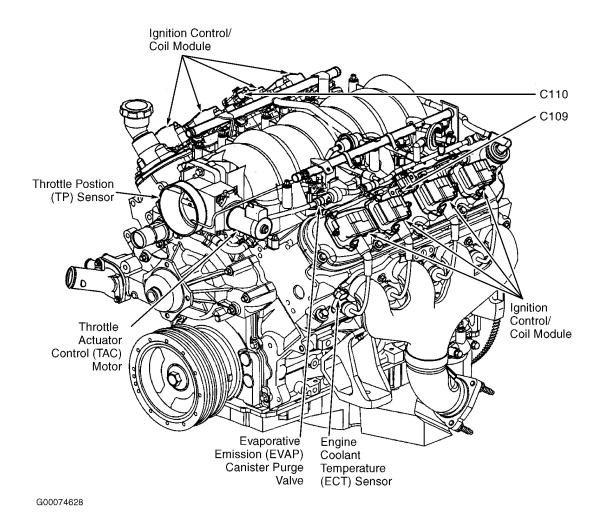


Fig. 3: Left Front Of Engine Courtesy of GENERAL MOTORS CORP.


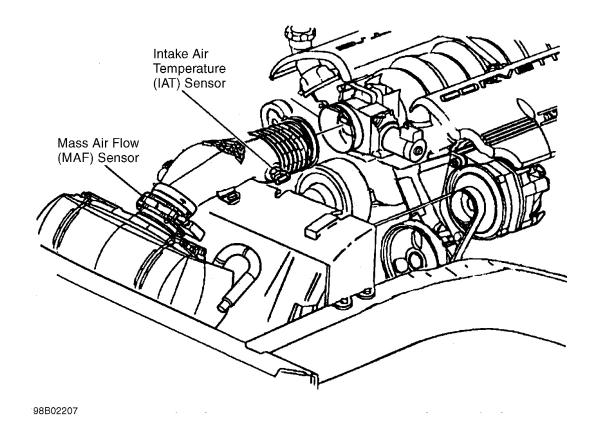


Fig. 4: Front Of Engine Compartment Courtesy of GENERAL MOTORS CORP.

### 2001 GENERAL MOTORS Corvette

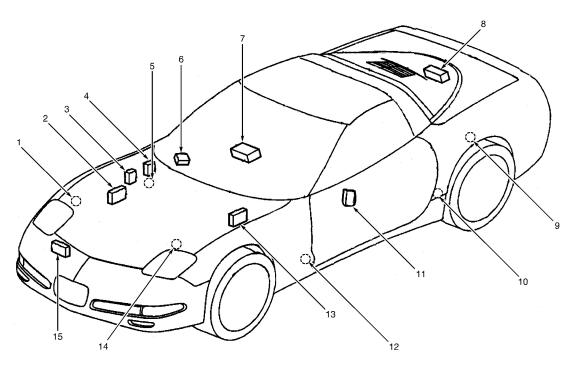

- 1. G102
- 2. Underhood Fuse Block (A/C CLU Relay/ Air Pump Relay/ Back-Up LP Relay Cooling Fan 1 Relay/ Cooling Fan 1 Relay/ Cooling Fan 2 Relay/ Cooling Fan 3 Relay/ Fog LP Relay/ Fuel Pump Relay/ Horn Relay/ Ignition Relay/ RTD Relay)

G00074629

- 3. Powertrain Control Module (PCM)
- 4. Blower Motor Control Module
- 5. G104, G108
- 6. Instrument Panel Fuse Block (ALC HDLP Relay/ ALC PRK LP Relay/ Bose Relay/ Courtesy Lamp Relay/
  Daytime Running Lamp Relay (2)/
  Defogger RR Relay/
  Hatch/TRK Relay/ Monitored Micro Relay/ TONN REL Relay)
- 7. RH Relay Center
- 8. Electronic Suspension Control (ESC) Module 9. G401
- 10. G205
- 11. Driver Seat Control Module
- 12. G201
- 13. Inflatable Restraint Sensing & Diagnostic Module
- 14. G101
- 15. Headlamp Opening Door Actuator Control Module

Fig. 5: Vehicle Overview Courtesy of GENERAL MOTORS CORP.